



# ELECTROLYTE AND BATTERY USING IT

**Publication number:** JP2004311272  
**Publication date:** 2004-11-04  
**Inventor:** UGAWA SHINSAKU  
**Applicant:** SONY CORP  
**Classification:**  
 - international: **H01M10/40; H01M10/36; (IPC1-7): H01M10/40**  
 - european:  
**Application number:** JP20030104874 20030409  
**Priority number(s):** JP20030104874 20030409

Also published as:

 US2004202941 (A1)  
 CN1610172 (A)


Report a data error here

## Abstract of JP2004311272

**PROBLEM TO BE SOLVED:** To provide an electrolyte and a battery capable of sufficiently improving a cycle characteristic.

**SOLUTION:** An electrode rolled body 20 composed by stacking and rolling a positive electrode 21 and a negative electrode 22 by interlaying a separator is installed in a battery can. This electrolyte is impregnated into the separator. The electrolyte contains: 5-40% by mass of a high-dielectric-constant solvent formed of at least one of ethylene carbonate and propylene carbonate; 58-93% by mass of dimethyl carbonate; and 0-5% by mass of diphenyl carbonate.

COPYRIGHT: (C)2005,JPO&NCIPI

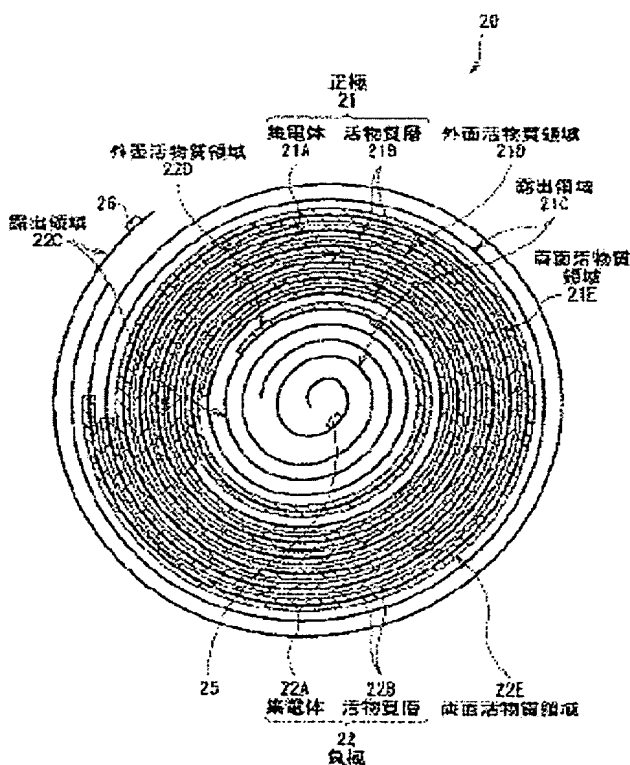

Data supplied from the esp@cenet database - Worldwide